


Grade 10 Short Link Chain

- Alloy steel material, heat treated.
- Blue painted finish.
- Grade 10 vs Grade 8 increase in load capacity upto 25%. Reduction of slings weight upto 40%. Better wear resistance enabling longer performance.
- Can be certified to ASTM A973, and meets the performance requirements of BS-EN 818-2, Working temperature range: -29°C to +205°C.
- Marked with manufacturers identification and grade (10/100).

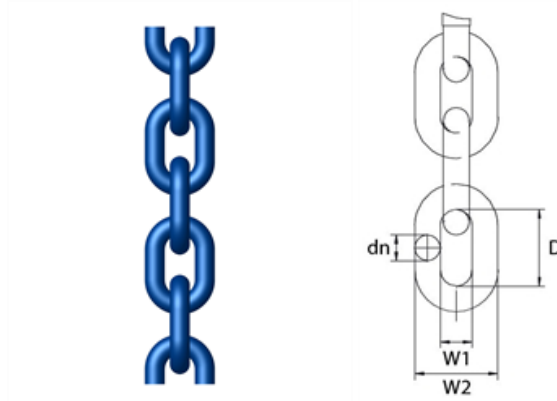

Dimensions

Code	Dia (mm)	D (mm)	W1 (min) (mm)	W2 (max) (mm)
S1001	6	18	7.8	22.2
S1002	7	21	9.1	25.9
S1003	8	24	10.4	29.6
S1004	10	30	13.0	37.0
S1005	13	39	16.9	48.1
S1006	16	48	20.8	59.2
S1007	19	57	24.7	70.3
S1008	22	66	28.6	81.4

Technical Data

Dia (mm)	Drum Length (mtrs)	Working Load Limit (tonnes)	Manufacturing Proof Force (kN)	Breaking Force (kN min)	Weight Approx (kgs)
6	100	1.4	35.3	56.5	0.83
7	100	1.9	48.1	77.0	1.17
8	100	2.5	62.8	102.0	1.51
10	100	4	98.2	157.0	2.40
13	50	6.7	166.0	265.0	4.00
16	50	10	251.0	402.0	6.00
19	25	14	354.0	567.0	8.71
22	25	19	478.0	760.0	11.40

