


Grade 10 Connecting Link WLK Series

- Meets the performance requirements of EN1677 - 1.
- Can be certified in accordance with ASTM A 952.
- Suitable for use with grade 10 chain and fittings.
- Painted finish.
- Alloy steel, quenched and tempered.
- Designed for easy attaching of hooks and master links to other grade 8 and 10 chains and fittings.
- Marked with manufacturers identification, traceability code, size and material grade.

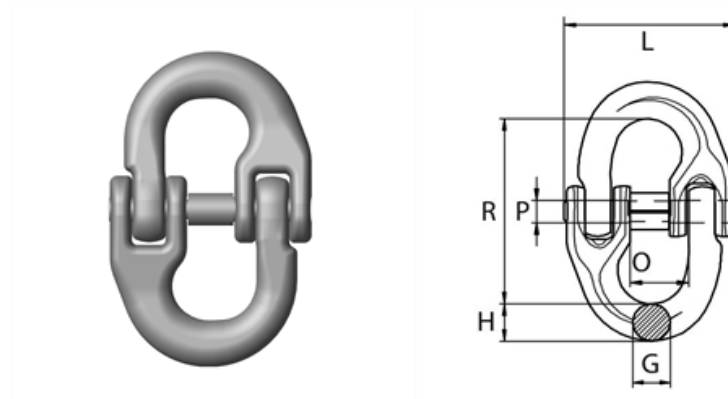

Dimensions

Code	Part No	Chain Dia (mm)	D (mm)	H (mm)	G (mm)	O (mm)	R (mm)	P x L (mm)
S2201	WLK6	6	13.9	7.8	7.6	14.0	44.0	4.8 x 39.0
S2202	WLK7	7	17.0	10	9.0	17.0	51.0	6.0 x 47.0
S2203	WLK8	8	18.2	11.5	10.0	18.0	61.5	6.3 x 53.0
S2204	WLK10	10	23.0	12.6	12.6	22.5	72.0	8.0 x 63.0
S2205	WLK13	13	27.6	19.0	16.7	27.5	88.0	10.0 x 79.0
S2206	WLK16	16	32.9	21	21.0	33.0	103.0	14.0 x 106.0
S2207	WLK19-20	19-20	41.5	29.5	23.5	41.5	115.0	16.0 x 123.0
S2208	WLK22	22	48.0	29.0	27.0	48.5	135.0	16.0 x 144.0

Technical Data

Chain Dia (mm)	Working Load Limit (tonnes)	Manufacturing Proof Force (kN)	Breaking Force (kN min)	Weight (kg)
6	1.4			0.07
7	1.9			0.12
8	2.5			0.19
10	4			0.34
13	6.7			0.73
16	10			1.43
19-20	16			2.45
22	19			3.21

