


## Grade 10 Eye Swivel Self Locking Hook SKS Series

- Meets the performance requirements of EN1677 - 3.
- Can be certified in accordance with ASTM A 952.
- Suitable for use with grade 10 chain and fittings and fibre / wire rope slings.
- Painted finish.
- Alloy steel, quenched and tempered.
- Large swivel eye makes assembly to fibre / wire rope slings (with thimbles) easier.
- Marked with manufacturers identification, traceability mark, size and material grade.
- Spare locking system trigger kit available.

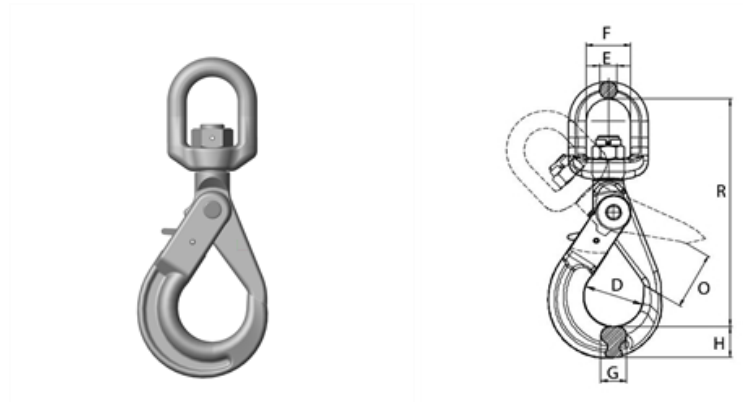

### Dimensions

| Code  | Part No | Chain Dia (mm) | D (mm) | E (mm) | F (mm) | H (mm) | G (mm) | O (min) (mm) | R (mm) | W.L.L. (kg) | Weight (kg) |
|-------|---------|----------------|--------|--------|--------|--------|--------|--------------|--------|-------------|-------------|
| S1111 | SKS6    | 6              | 35.0   | 13     | 35     | 20.5   | 16.0   | 28.0         | 160    | 1,400       | 0.6         |
| S1112 | SKS7-8  | 7-8            | 43.5   | 13     | 35     | 26.0   | 20.0   | 34.0         | 181    | 2,500       | 1.1         |
| S1113 | SKS10   | 10             | 56.0   | 16     | 42     | 30.0   | 24.5   | 45.0         | 218    | 4,000       | 2.0         |
| S1114 | SKS13   | 13             | 69.0   | 20     | 49     | 40.0   | 34.5   | 51.5         | 269    | 6,700       | 4.0         |
| S1115 | SKS16   | 16             | 80.0   | 24     | 60     | 50.0   | 35.5   | 60.0         | 319    | 10,000      | 6.8         |

### Technical Data

| Chain Dia (mm) | Working Load Limit (tonnes) | Manufacturing Proof Force (kN) | Breaking Force (kN min) | Weight (kg) |
|----------------|-----------------------------|--------------------------------|-------------------------|-------------|
| 6              | 1.4                         |                                |                         | 0.6         |
| 7-8            | 2.5                         |                                |                         | 1.1         |
| 10             | 4                           |                                |                         | 2.0         |
| 13             | 6.7                         |                                |                         | 4.0         |
| 16             | 10                          |                                |                         | 6.8         |