


## Grade 10 Master Link Assembly

- Meets the performance requirements of BS-EN 1677-4.
- Suitable for use with grade 10 chains.
- Painted finish, welded, quenched and tempered.
- Designed for use with 3 & 4 leg slings
- Proof loaded to 2.5 times the W.L.L.
- Minimum breaking load 4 times the W.L.L.
- Marked with size, manufacturers traceability code and part number.
- Alloy Steel, heat treated.

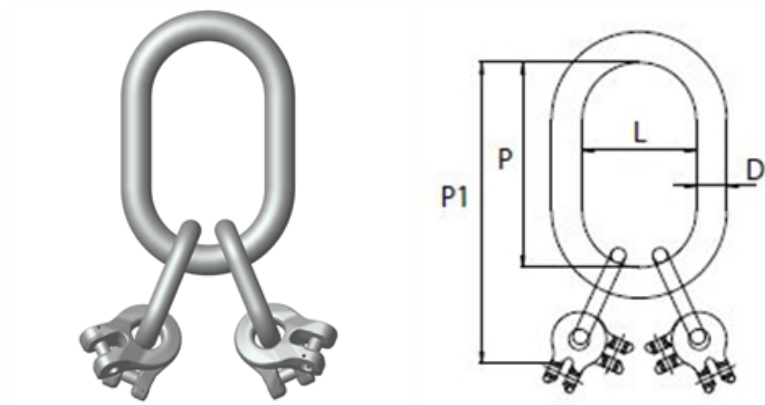

Code	Part No	Chain Dia (mm)	D (mm)	P (mm)	P1 (mm)	L (mm)	W.L.L. (tonnes)	Weight (kgs)
S2161	D18L13CR	6	19	135	225	75	3	1.7
S2163	D22L16CR	7/8	23	160	272	90	5.3	3.3
S2164	D26L20CR	10	27	180	314	100	8.4	5.5
S2165	D32L22CR	13	33	200	378	110	14.0	9.9
S2166	D36L26CR	16	36	260	475	140	21.2	16.4
S2167	D50L32CR	19/20	50	350	595	190	33.6	34.7
S2168	D50L36CR	22	50	350	622	190	40.0	39.9