


Grade 10 Oversized Quad Master Link Assemblies DE Series

- Meets the performance requirements of BS-EN 1677-4.
- Suitable for use with grade 10 chains, and with large sub link for use with fibre / wire rope slings.
- Painted finish.
- Designed for use with 3 & 4 leg slings
- Proof loaded to 2.5 times the W.L.L.
- Minimum breaking load 4 times the W.L.L.
- Marked with size, manufacturers traceability code and part number.
- Alloy Steel, heat treated, quenched and tempered.
- Link with flat available on request (DEF series)
- Welded.

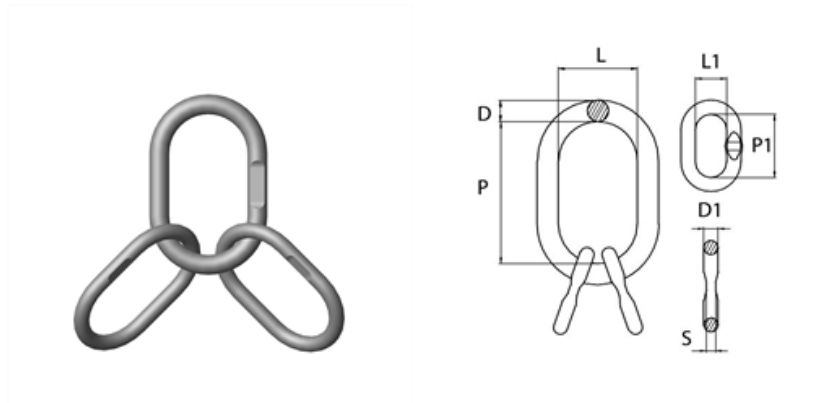

Code	Part No.	chain dia. 3-4 legs (mm)	D (mm)	P (mm)	L (mm)	D1 (mm)	P1 (mm)	L1 (mm)	S DLF series (mm)	W.L.L. (tonnes)	weight approx (kgs)
S2122	D18E14	7	19	135	75	15	120	70	8	5.05	1.94
S2123	D22E16	8	23	160	90	17	140	80	8	6.95	3.12
S2124	D26E20	10	27	180	100	20	160	95	11.5	10.4	4.92
S2125	D32E26	13	33	200	110	27	190	110	14	18	9.50
S2126	D38E32	16	38	275	150	33	230	130	18	27.7	17.00
S2127	D50D38	19/20	50	350	250	38	275	150	-	41.55	32.60
S2128	D56D45	22	56	350	250	45	340	180	-	50.25	48.10