


Grade 8 DNV Master Links

- Conforms to EN 1677-4.
- Individual or Type approved according to DNV 2.7-1 and EN 12079-2.
- Specially designed for use on offshore containers.
- Manufactured with special alloy steels having good ductility (42J min.) at low temperatures (-40 degrees C).

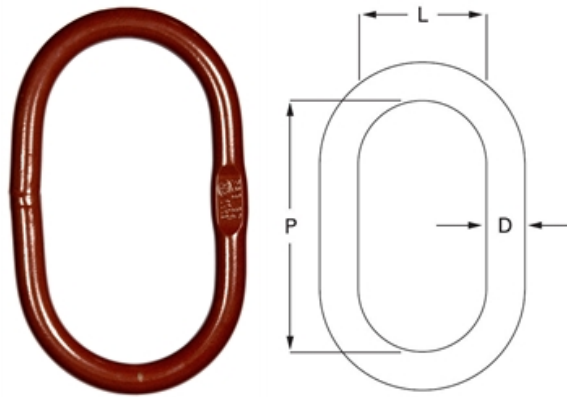

Part No. & Code	W.L.L (tonnes)	D (mm)	P (mm)	L (mm)	Weight (kgs/each)
F22	5.8	23	270	140	2.5
F25	8.83	25	270	140	3.0
F28	11.8	27	270	140	3.5
F32	17.1	33	270	140	5.4
F36	23	36	270	140	6.5
F40	28.1	40	275	150	8.3
F45	38.3	45	340	180	12.8
F50	45	50	350	190	16.5
F60	65	60	430	230	29.1
F70	85	70	480	260	44.6