


GT Cobra Grade 80 Master Links

- Suitable for use with Grade 80 Chain and Fittings.
- Painted finish.
- Alloy steel, quenched and tempered.
- Designed for use with 1 or 2 leg slings.

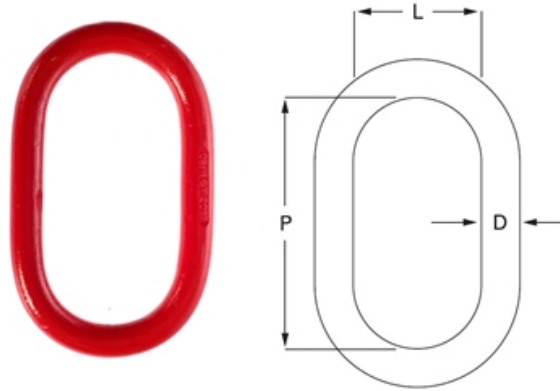

Code	Model	D (mm)	P (mm)	L (mm)	Working Load Limit (tonnes)	Proof Load (tonnes)	Minimum Breaking Load (tonnes)	Weight (kgs/each)
N0900	11B4	11	83	40	2.1	3.40	8.4	0.2
N0901	13B5	13	95	51	2.7	4.60	10.8	0.3
N0902	13B6	13	115	60	2.7	4.00	10.8	0.4
N0904	16B6	16	120	70	4.1	6.15	16.4	0.6
N0906	16B7	16	190	100	3.2	4.50	12.8	0.9
N0905	20B6	20	150	82	6.7	10.80	26.8	1.1
N0907	20B7	20	170	90	6.5	9.80	26	1.3
N0908	22B6	22	170	90	8.2	12.90	32.8	1.56
N0909	22B7	22	210	110	7.2	10.60	28.8	1.9
N0921	22B8	22	270	140	5.8	8.70	23.2	2.5
N0910	25B6	25	190	100	10.7	16.00	42.8	2.3
N0911	28B6	28	210	110	12.9	20.00	51.6	3.2
N0912	28B7	28	270	140	11.8	17.70	47.2	2.5
N0913	32B6	32	270	140	17.1	25.60	68.4	5.3
N0914	38B6	38	270	140	28.1	43.00	112.4	7.5
N0915	38B7	38	420	220	19.1	28.70	76.4	11.0
N0916	45B6	45	320	170	38.3	57.40	153.2	12.5
N0917	45B7	45	470	250	27.6	41.50	110.4	17.5
N0918	50B6	50	380	200	45.0	67.50	180	18.0
N0919	60B6	60	430	220	65.3	100	261.2	28.85
N0920	70B6	70	500	250	84.4	130	337.6	45.48