


## Galvanised Drop Forged Turnbuckles Jaw/Jaw

- Drop forged, high tensile steel, SAE 1035 or SAE 1045.
- Meets the performance requirements of ASTM F1145-92 & US Fed Spec FF T 791 b.
- Hot dipped galvanised finish.
- Proof load tested to 2 times the W.L.L.
- Minimum breaking load is 5 times the W.L.L.
- UNC Threads.
- All items available with lock nuts.

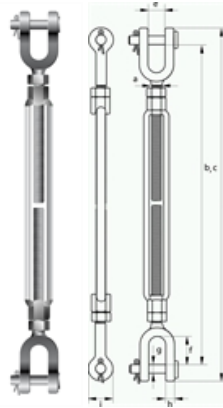

Code	W.L.L (tonnes)	a (Inches)	Take Up (Inches)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)	i (mm)	Weight (kgs)
W0501	0.54	3/8	6	274	416	302	13	22	8	8	21	0.57
W0502	1	1/2	6	306	452	338	16	26	9.5	10	25	0.96
W0503	1	1/2	9	380	585	414	16	26	9.5	10	25	1.18
W0504	1	1/2	12	456	719	490	16	26	9.5	10	25	1.50
W0505	1.59	5/8	6	346	508	394	18	33	13	13	33	1.84
W0506	1.59	5/8	9	421	641	470	18	33	13	13	33	2.12
W0507	1.59	5/8	12	497	775	546	18	33	13	13	33	2.56
W0508	2.36	3/4	6	369	546	432	23	38	15.5	16	41	2.68
W0509	2.36	3/4	9	443	679	508	23	38	15.5	16	41	3.03
W0510	2.36	3/4	12	519	813	584	23	38	15.5	16	41	3.29
W0511	2.36	3/4	18	671	1080	737	23	38	15.5	16	41	3.65
W0512	3.27	7/8	12	551	854	618	27	44	19	18	48	4.90
W0513	3.27	7/8	18	705	1121	772	27	44	19	18	48	5.95
W0514	4.54	1	6	448	638	524	30	52	22	20	54	5.21
W0515	4.54	1	12	598	905	676	30	52	22	20	54	6.96
W0516	4.54	1	18	751	1172	829	30	52	22	20	54	8.95
W0517	4.54	1	24	902	1437	980	30	52	22	20	54	7.85
W0518	6.89	1.1/4	12	657	989	753	44	73	29	25	67	11.9
W0519	6.89	1.1/4	18	809	1255	905	44	73	29	25	67	14
W0520	6.89	1.1/4	24	962	1521	1058	44	73	29	25	67	13
W0521	9.71	1.1/2	12	689	1052	804	52	70	35	27	80	16.9
W0522	9.71	1.1/2	18	841	1318	956	52	70	35	27	80	18.7
W0523	9.71	1.1/2	24	994	1585	1109	52	70	35	27	80	18.4

<b>Code</b>	<b>W.L.L</b> (tonnes)	<b>a</b> (Inches)	<b>Take Up</b> (Inches)	<b>b</b> (mm)	<b>c</b> (mm)	<b>d</b> (mm)	<b>e</b> (mm)	<b>f</b> (mm)	<b>g</b> (mm)	<b>h</b> (mm)	<b>i</b> (mm)	<b>Weight</b> (kgs)
W0524	12.7	1.3/4	18	918	1403	1049	59	85	41	33	90	25
W0525	12.7	1.3/4	24	1070	1670	1201	59	85	41	33	90	28.7
W0526	16.78	2	24	1136	1772	1295	64	93	51	39	108	45.4
W0527	27.22	2.1/2	24	1276	1943	1476	75	114	57	38	143	73
W0528	34.02	2.3/4	24	1334	2019	1560	89	110	70	42	156	98