


Green Pin ROV Spring Release Polar Shackles - P-5367

- Grade 8 alloy steel body and pin, quenched and tempered.
- Minimum breaking load is 5 times the W.L.L.
- White painted body & green painted pin.
- Temperature range -40°C up to +200°C.
- Supplied with an EC declaration of conformity.
- Supplied with a 3.1 material certificate upon request.
- For in-line use only.
- This shackle is assembled with wire rope slings and monkeys fist.
- For shackles from 35 t up to and including 150 t a special compression tool (tensioner) is required to assemble the shackle.

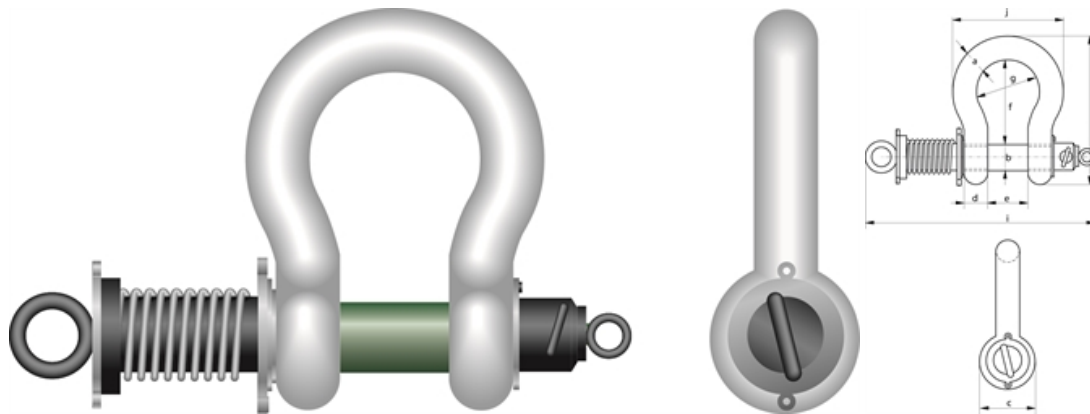

Code	W.L.L tonnes	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)	i (mm)	j (mm)	Weight kgs
~	12	32	35	72	32	51	115	83	201	262	147	6
~	13.5	35	38	80	35	57	133	92	227	275	162	7
~	17	38	42	88	38	60	146	99	249	330	175	14
~	25	45	50	103	45	74	178	126	300	352	216	16
~	35	50	57	116	50	83	197	138	334	373	238	21
~	42.5	57	65	130	57	95	222	160	377	442	274	32
~	55	65	70	145	65	105	260	180	433	470	310	43
~	85	75	83	162	73	127	329	190	527	579	340	71
~	120	95	95	208	91	147	399	238	646	674	428	131
~	150	105	108	238	102	169	410	275	688	699	485	171