


Green Pin ROV Release & Retrieve Shackles With Tapered Pin & Fishtail Handle - P-5361F

- Grade 8 alloy steel polar quality body and pin, quenched and tempered.
- Minimum breaking load is 5 times the W.L.L.
- White painted body & green painted pin.
- Temperature range -60°C up to +200°C.
- Supplied with an EC declaration of conformity.
- Supplied with a 3.1 material certificate upon request.
- For in-line use only.
- Self wiring plan required.

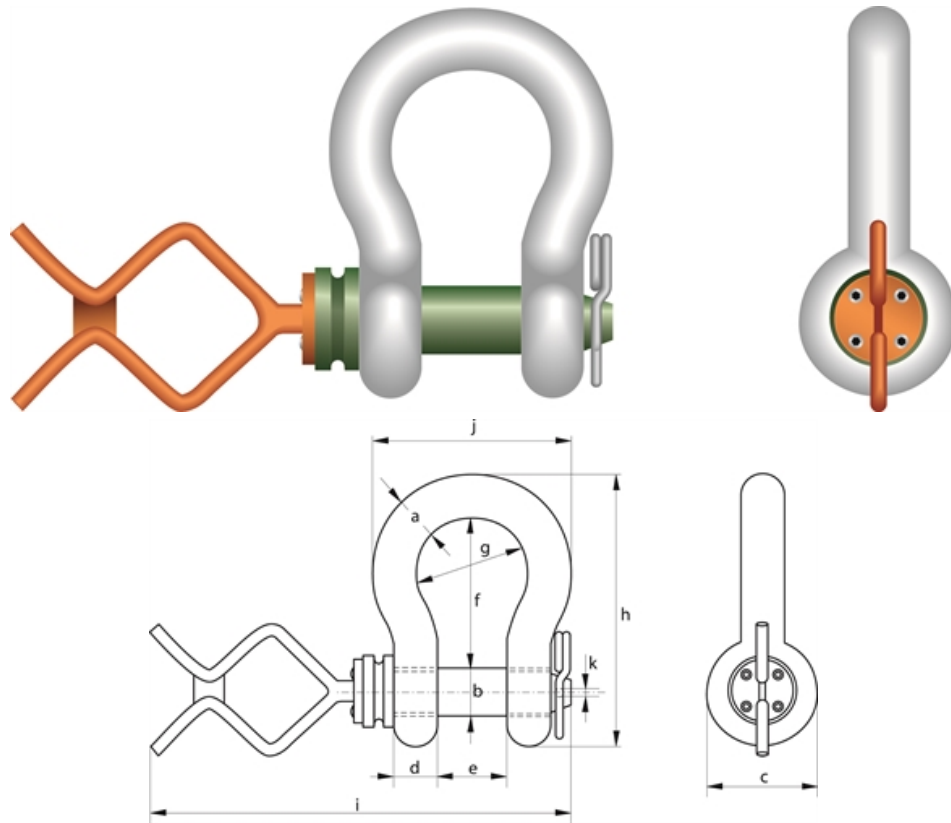

Code	W.L.L tonnes	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)	i (mm)	j (mm)	k (mm)	Weight kgs
-	6.5	22	25	52	22	36	83	58	144	419	102	3.5	1.50
-	9.5	28	32	66	28	47	108	75	185	455	131	5.5	3.16
-	12	32	35	72	32	51	115	83	201	467	147	6.5	4.31
-	17	38	42	88	38	60	146	99	249	491	175	8.5	7.43
-	25	45	50	103	45	74	178	126	300	538	216	8.5	12.84
-	35	50	57	111	50	83	197	138	331	558	238	8.5	18.15
-	42.5	57	65	130	57	95	222	160	377	590	274	7.5	26.29
-	55	65	70	145	65	105	260	180	433	619	310	7.5	37.60