


Commercial Shackles Dee Type Countersunk Pin

- Mild Steel, not heat treated.
- Electro galvanised and hot dip galvanised.
- Untested, not to be used for lifting

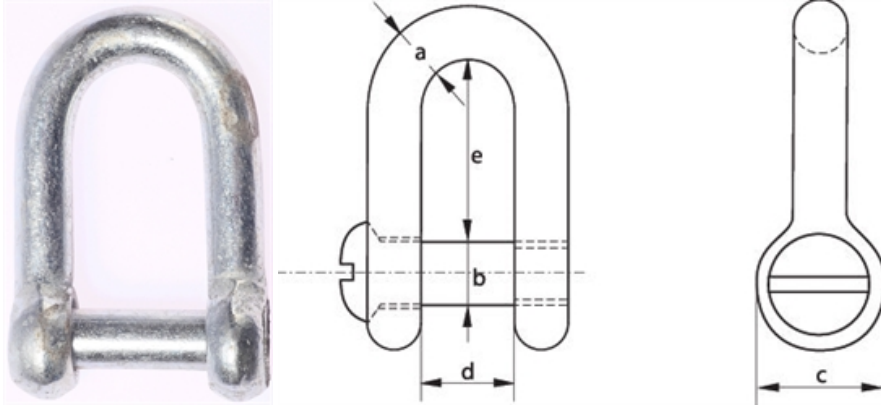

Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Weight (kgs/per 100)
~	8	8	16	16	32	5.72
C0604	10	10	20	20	40	11.2
C0601	11	11	22	22	44	14.9
C0602	12	12	24	24	48	19.3
~	14	14	28	28	56	30.7
C0603	16	16	32	32	64	45.8
~	20	20	40	40	80	89.5
~	22	22	44	44	88	119
~	25	25	50	50	100	175