


Grade 8 Clevis Self Locking Hooks (ELD Series)

- Meets the performance requirements of BS-EN 1677-3.
- Suitable for use with Grade 8 Chains.
- Painted finish.
- Alloy steel, quenched and tempered.
- Clevis fitting enables direct connection to chain.
- Marked with manufacturers identification and material grade.
- Spare locking system trigger kit available.
- Spare Clevis load and retaining pins available.

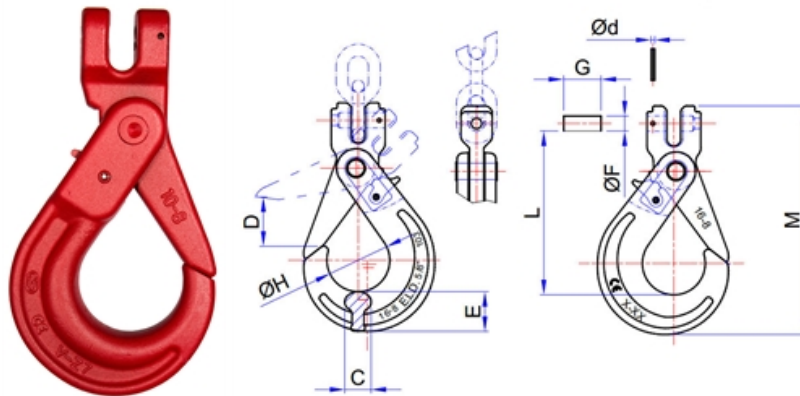

Dimensions

Code	Chain Dia (mm)	Part No.	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	d (mm)	H (mm)	L (mm)	M (mm)
K0961	7/8	103-7/8	20	33	25	10	28	3	45	122	165
K0962	10	103-10	27	44	36	12.5	35	3	58	151	207
K0963	13	103-13	31	54.5	40	16	38	4	71	184	255
K0964	16	103-16	40	67	52	20	50	5	84	212	300
K0965	20		48	90	62	24	80	6	90	243	340

Technical Data

Chain Dia (mm)	Working Load Limit (tonnes)	Manufacturing Proof Force (kN)	Breaking Force (kN min)	Weight (kgs/each)
7/8	2	50.3	80.4	0.93
10	3.15	78.5	126	1.73
13	5.3	133	212	3.10
16	8	201	322	6
20	12.5	314	503	7.50