


Small Dee Shackle c/w Type A Screw Collar Pin

- Meets the W.L.L performance requirements of the withdrawn standard BS 3032.
- High tensile steel.
- Self colour and hot dip galvanised finish available.
- Supplied with an EC declaration of conformity.
- Factor of Safety 4:1.
- Marked with manufacturers mark, ID mark, W.L.L & CE.

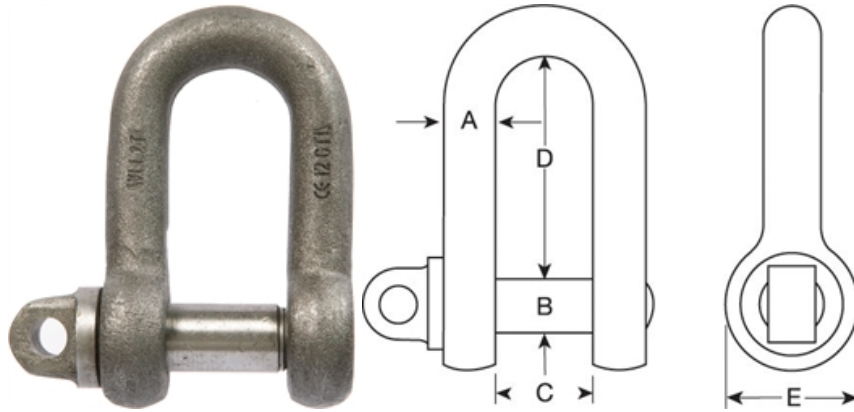

Code Self Colour	Code Galvanised	W.L.L (tonnes)	A (inches)	B (inches)	C (inches)	D (inches)	E (inches)	Weight (kgs/each)
B0560	B2550	0.30	1/4	3/8	3/8	7/8	3/4	0.06
B0550	B2551	0.60	3/8	1/2	5/8	1 3/8	1	0.15
B0551	B2552	1.00	1/2	5/8	7/8	1 7/8	1 1/4	0.33
B0552	B2553	1.75	5/8	3/4	1	2 1/4	1 1/2	0.61
B0553	B2554	2.50	3/4	7/8	1 1/4	2 3/4	1 3/4	0.93
B0554	B2555	3.50	7/8	1	1 3/8	3 1/4	2	1.80
B0555	B2556	4.50	1	1 1/8	1 1/2	3 5/8	2 1/4	2.15
B0556	B2557	5.50	1 1/8	1 1/4	1 3/4	4 1/8	2 1/2	3.02
B0557	B2558	7.00	1 1/4	1 3/8	1 7/8	4 1/2	2 3/4	4.20
B0558	B2559	8.00	1 3/8	1 1/2	2 1/8	5	3	5.34
B0559	B2560	10.75	1 1/2	1 3/4	2 3/8	5 1/2	3 1/2	8.36
B0561	-	13.00	1 5/8	1 7/8	2 1/2	5 7/8	-	9.53